


## سانتریفیوژ دو طرفه فوروارد Centrifugal Fan With External- Rotor Motors /Double Forward

BEF series




- Centrifugal Forward Fan type 9 different size and models
- Specially design for Wide spaces and Industrial Equipment
- Used of Heating and cooling equipment, dryer and transfer air with pressure in channel
- Adjustable speed
- Galvanized body
- Direct Drive
- External Rotor
- Motor protection IP54
- Impeller diameter 20x20 to 38x38
- Aeration power 1700m<sup>3</sup>/h to 11000m<sup>3</sup>/h

- سانتریفیوژ طراحی شده دمنده فوروارد، دارای ۹ سایز و مدل متفاوت
- طراحی شده برای فضاهای بزرگ و تجهیزات صنعتی
- مورد استفاده برای تجهیزات برودتی و حرارتی، خشک کن و انتقال هوا با فشار در کانالها
- قابلیت تنظیم سرعت
- با بدنه ورق گالوانیزه
- اتصال مستقیم الکتروموتور به پروانه، بدون نیاز به تسمه (حالت Direct Drive)
- موتور اکسترنال روتور (External Rotor)
- با درجه حفاظت موتور IP 54
- دارای قطر پروانه 20x20cm تا 38x38cm
- قدرت هوادهی 1700m<sup>3</sup>/h تا 11000m<sup>3</sup>/h

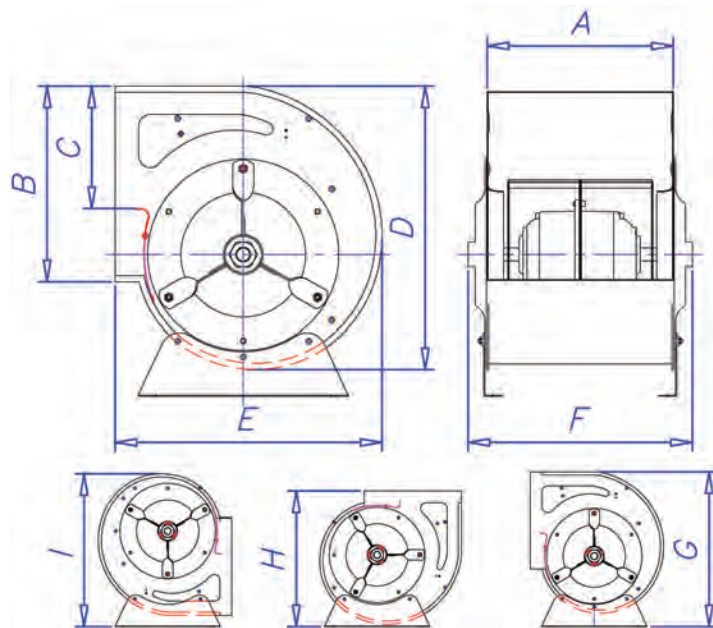

Model	TYPE	Fan Dia	Voltage	Consumption current	Power	Frequency	Power factor	Rated engine speed	Extract capacity	Capacit y	Motor protection	Weight	Dimensions (mm)								
		(cm)	(V)	(A)	(W)	Hz	Cosφ	R.P.M	m3/h	μF	IP		Kg	A	B	C	D	E	F	G	H
BEF-20/20E4S	Double Inlet	20X20	220	1.7	350	50	0.93	1300	2200	10	54	10.8	230	245	100	350	345	336	400	390	400
BEF-20/20E4T	Double Inlet	20X20	380	0.9	415	50	0.7	1330	2300	0	54	10.8	230	245	100	350	345	336	400	390	400
BEF-20/20E6S	Double Inlet	20X20	220	0.8	170	50	0.97	900	1700	6	54	10.6	230	245	100	350	345	336	400	390	400
BEF-25/25F4S	Double Inlet	25X25	220	3.5	720	50	0.9	1350	4400	20	54	17	295	310	110	480	430	360	500	470	500
BEF-25/25F6S	Double Inlet	25X25	220	2.1	420	50	0.9	800	3000	12	54	16.7	295	310	190	480	430	360	500	470	500
BEF-25/25F4T	Double Inlet	25X25	380	1.4	700	50	0.76	1370	4500	0	54	17	295	310	110	480	430	360	500	470	500
BEF-30/30M8S	Double Inlet	30X30	220	3.2	650	50	0.92	670	5400	35	54	27.3	390	375	240	550	500	495	575	535	575
BEF-30/30M8T	Double Inlet	30X30	380	2	700	50	0.53	680	5500	0	54	27.3	390	375	240	550	500	495	575	535	575
BEB-38/30M8S	Double Inlet	38X30	220	4.8	900	50	0.85	650	7200	55	54	37	390	410	265	620	580	495	640	610	640
BEF-38/38M8S	Double Inlet	38X38	220	5.8	1200	50	0.94	680	8000	65	54	44.7	465	410	265	620	580	530	640	610	640
BEF-38/38M6T	Double Inlet	38X38	380	5.5	2700	50	0.75	800	11000	0	54	45	465	410	265	620	580	530	640	610	640

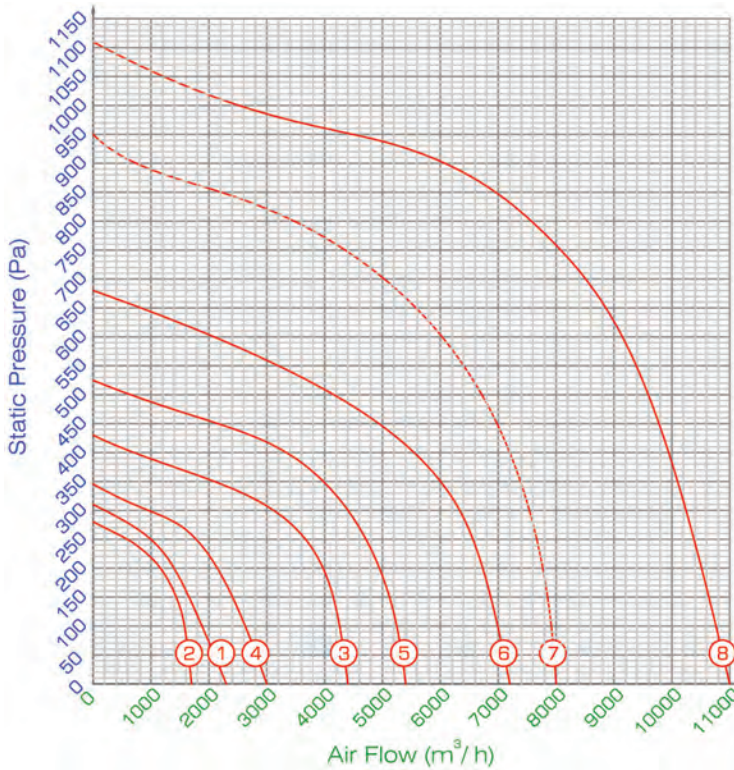

- ① BEF-20/20E4S
- ② BEF-20/20E6S
- ③ BEF-25/25F4S
- ④ BEF-25/25F6S
- ⑤ BEF-30/30M8S
- ⑥ BEF-38/30M8S
- ⑦ BEF-38/38M8S
- ⑧ BEF-38/38M6T